

AC drive VersiDrive i E3/3E3/IP66ODS [0,37 - 22kW]

Features:

- ☒ small design for IP66 unit for outdoor use
- ☒ easy programming and connection
- ☒ precise and reliable control for IE2, IE3 & IE4 motors
- ☒ induction motors, PM motors, brushless DC motors, synchronous reluctance motors
- ☒ 14 parameters for basic settings
- ☒ precise digital control via push of a button
- ☒ application macros (industrial, pumps and fan operation)
- ☒ PTC input
- ☒ max. rotating field frequency 500Hz
- ☒ integrated braking chopper (up from 2,2kW)
- ☒ integrated mains filter
- ☒ serial communication with Modbus RTU and CANopen



Frequenzumrichter
VD i E3/IP66ODS [0,37 – 2,2kW]
VD i 3E3/IP66ODS [0,75 – 22kW]

Function:


- ☒ control and setpoint entry via terminals, operating unit and Bus-systems
- ☒ PWM clock frequency 4 - 32kHz
- ☒ DC braking
- ☒ potential-free control and signalling contacts
- ☒ 150% overload for 6os
- ☒ detailed trouble check via parameter „O“
- ☒ integrated PI controller
- ☒ U/f characteristics control
- ☒ Open Loop vector speed control
- ☒ Open Loop speed control for synchronous motors
- ☒ BLDC vector control
- ☒ synchronous reluctance motor
- ☒ „IP66S“ model with potentiometer, right left switch and line disconnector

Typical Application:

electric pumps, heat pumps, vacuum pumps
ventilators and fans, travelling cranes, extraction systems
compressors, stirrers, centrifuges, saws
conveyors, woodworking machines
grinding machines, textile machines
packaging machines, printing machines
others

Options: (please see accessories)

- ☒ memory stick with copying function
- ☒ remote control module (LED or OLED display)
- ☒ RJ45 cable and cable splitter
- ☒ braking resistors
- ☒ software for parameterization
- ☒ AC drive without switch (upon request)

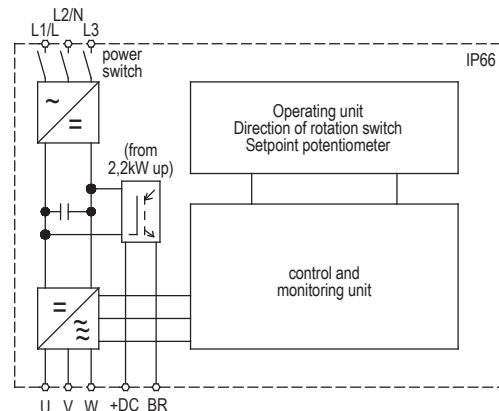


Typical designation	VD i .../E3/IP66ODS								VD i .../3E3/IP66ODS							
	037	075	150	220	075	150	220	400	550	750	1100	1500	1850	2200		
motor shaft power / kW	0,37	0,75	1,5	2,2	0,75	1,5	2,2	4,0	5,5	7,5	11	15	18,5	22		
mains voltage according to DIN EN 50160 (IEC 38)	single-phase 200-240V, 48-62Hz								three-phase 380-480V, 48-62Hz							
output current / A	2,3	4,3	7	10,5	2,2	4,1	5,8	9,5	14	18	24	30	39	46		
order number with switch IP66ODS: 21312...	23037	23075	23150	23220	40075	40150	40220	40004	40005	40007	40011	40015	40018	40022		

AC drive VersiDrive i E3/3E3/IP66ODS [0,37 - 22kW]

Technical data		VD i .../E3/IP66ODS				VD i .../3E3/IP66ODS										
		037	075	150	220	075	150	220	400	550	750	1100	1500	1850	2200	
motor shaft power / kW		0,37	0,75	1,5	2,2	0,75	1,5	2,2	4,0	5,5	7,5	11,0	15,0	18,5	22,0	
mains voltage according to DIN EN 50160 (IEC 38)		single-phase 200-240V, 48-62Hz				three-phase 380-480V, 48-62Hz										
output voltage / V		2,3	4,3	7	10,5	2,2	4,1	5,8	9,5	14	18	24	30	39	46	
peak current for 1min./ A		3,5	6,5	10,5	15,7	3,3	6,2	8,7	14,3	21	27	36	45	58	69	
control functions																
frequency setting range		0 – 500Hz														
torque boost		sensorless vector speed control, PM vector control, BLDC vector control, synchronous reluctance motor														
ramp-up and ramp down time		0 ... 600s														
frequency setpoint		potentiometer $\geq 1\text{k}\Omega$, analogue signals, keypad, fixed frequencies, motor potentiometer Modbus RTU, CANopen														
ambient / storage temperature		-10 ... 50°C, -40 ... 60°C														
design size		1		2		1		2		3		4				
weight / kg		1		1,7		1		1,7		3,2		9,1				

Dimensions:

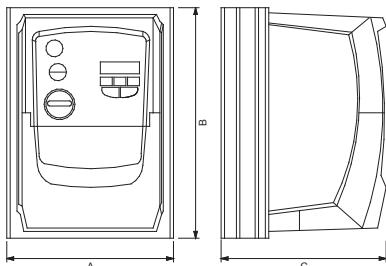

size	A	B	C
1	161	232	162
2	188	257	182
3	210,5	310	238
4	240	360	275

All dimensions indicated in mm

Connection diagram:

